



Popular in health and fitness clubs, weight rooms, and ice rinks, Ultimate Tough recycled rubber flooring is a champion in a wide variety of applications.

- High Impact Durability
- Manufactured in the USA
- Premium Recycled Rubber
- Slip and Impact Resistant
- Easy to Clean
- Environmentally Friendly
- Customizable
- Shock and Sound Absorbing
- FloorScore Certified



ULTIMATE TOUGH ROLLS & TILES ARE GREAT FOR

WEIGHT ROOMS & GYMS	SCHOOL CAFETERIAS	SKI & SNOWBOARD SHOPS
MULTI-PURPOSE ROOMS	CONCESSION AREAS	HOME GYM FLOORING
WORK AREAS	ICE RINK WALKWAYS	STATIONARY BIKE MATTING
JUNGLE GYM & PLAY AREAS	FACTORY FLOORS	LOCKER ROOMS

ULTIMATE TOUGH PRODUCTS

Available in rolls or tiles, Ultimate Tough is ideal for high-wear and high-impact spaces that require maximum subfloor protection. Home gyms, weight rooms, and basements all benefit from durable rubber tile. It is manufactured from post-consumer recycled rubber buffings with small percentages colored EPDM. Ultimate Tough is the recommended choice for high-traffic active spaces. It provides excellent high-impact durability and superior slip resistance in wet or dry conditions. Ultimate Tough also combines anti-fatigue and ergonomic comfort properties with very low maintenance. Containing up to 92% recycled content range and low VOC emissions, Ultimate Tough is widely regarded as the premier “green” resilient flooring choice. It is available in rolls and interlocking and square tiles, and comes in 7 standard colors in variable thicknesses. Custom colors are also available.

Made From Recycled Rubber!

CALL TODAY
FOR A CUSTOM QUOTE!

Rev 3/19 | Ult. #1

ULTIMATE TOUGH SPECIFICATIONS



INTERLOCKING TILE DIMENSIONS

TILE SIZES

Interlocking	Coverage
18" X 18"	1.77 SQ FT
24" X 24"	3.2 SQ FT
36" X 36"	8.1 SQ FT
48" X 48"	14.5 SQ FT
Square	
18" X 18"	2.25 SQ FT
24" X 24"	4.0 SQ FT
36" X 36"	9.0 SQ FT
48" X 48"	16.0 SQ FT
*Zip-Tile	
28.5" X 28.5"	5.64 SQ FT

*THICKNESS

Standard:
4MM TO 12MM +/- 0.015"

COLORED EPDM GRANULATE

1MM TO 3MM

BINDER

POLYURETHANE

*CUSTOM AVAILABLE *MEASURED ON INSIDE



ROLL DIMENSIONS

*WIDTH

Standard:
4 FT. (1.22M)

WIDTH TOLERANCES

48" CUT @ 48.5" +/- 0.24"

*THICKNESS

Standard:
4MM TO 12MM
+/- 0.015"

*LENGTH

Standard:
25 FT. & 50 FT.

COLORED EPDM GRANULATE

1MM TO 3MM

BINDER

URETHANE

The color concentration of the standard rolls and tiles is 20%.

*CUSTOM AVAILABLE *3 FT. AVAILABLE AS CUSTOM WIDTH



ULTIMATE TOUGH SPECIFICATIONS


TEST TYPE	ASTM	RESULT
SHORE HARDNESS	D-2240	65 +/- 5
DENSITY	D-792	60-80 LBS./CU.FT.
ELONGATION (AT BREAK)	D-412	95% - 120%*
TENSILE STRENGTH	D-412	260 - 340 PSI*
COMPRESSION SET	D-395	-4.8%
VOC EMISSIONS	D-5116	0.5 MG/M ² OR LESS
RESISTANCE TO CHEMICALS	F-925-02	NO CHANGE
STATIC LOAD LIMIT	F-970	PASSES, 150 PSI
DIE- C TEAR	D-624	80 MIN
SURFACE FLAMMABILITY	D-2859	PASS
COEFFICIENT OF FRICTION	D-1894-95	>0.8*

*VARIES BASED ON COLOR

NOTE:

Physical properties can vary by product type.
Information above applies to this product only.

STANDARD COLORS

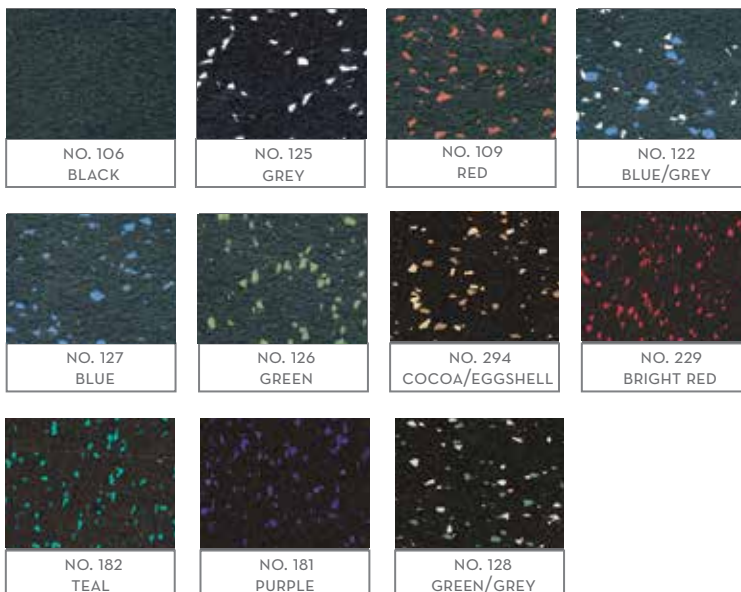

MAINTENANCE & FLOOR CARE

Maintenance and floor care depend on the desired appearance of the installed product and the type of equipment used to maintain the flooring. Use only Ultimate RB recommended cleaners, disinfectant, and neutral PH, non-petroleum products. Do not use harsh chemicals. For specific products recommended by Ultimate RB, visit UltimateRB.com

WARRANTY

Ultimate Tough Rolls and Tiles carry a 5-year limited warranty for defects in material and workmanship. Refer to UltimateRB.com for limited warranty document.

Rev 3/19 | Ult. #1

