

**Ultimate Tough Zip-Tiles stand up to the demands of athletic facilities by providing superior durability, resilience, spike resistance, and traction.**

- Recycled Rubber
- Slip Resistant
- Limitless Color Options
- Environmentally Friendly
- Design Flexibility
- Easy Installation
- Sound & Shock Absorbing
- Easy Maintenance
- FloorScore Certified

**ULTIMATE TOUGH ZIP-TILES ARE GREAT FOR**

HOME GYM FLOORING	STATIONARY BIKE MATTING	PHYSICAL THERAPY FACILITIES
SKI & SNOWBOARD SHOPS	RAMP & INCLINES	SCHOOLS
WEIGHT ROOMS & GYMS	BASEBALL AREAS	LOCKER ROOMS
HEAVY TRAFFIC AREAS	ICE RINK WALKWAYS	MULTI-PURPOSE ROOMS

**ULTIMATE TOUGH ZIP-TILES**

Flooring in athletic facilities must stand up to a variety of special demands ranging from the punishment of free weights to the shearing effect of ice skates. It must also provide noise reduction and a comfortable surface for the athletes. Recycled rubber flooring meets all these requirements. Ultimate Tough Zip-Tiles offer superior durability, resilience, sound absorption, spike resistance, and traction.

These tiles are engineered so precisely that the intricate interlocking pattern nearly disappears as the tiles are installed. The unique tab design holds the tiles together securely without the need for expensive adhesives, tapes, or the labor to apply them. The Ultimate Tough Zip-Tiles can also be disassembled and re-assembled time and again without damaging the tiles. Zip-Tiles also offer great anti-fatigue qualities. Fabricated from fine rubber granules, their resilient properties give superior underfoot comfort to cushion the strain from running, exercising, and walking. On top of that, they are also very easy to clean.



# ULTIMATE TOUGH ZIP-TILE SPECIFICATIONS

## TYPICAL PROPERTIES

### TILE SIZES

**Interlocking**  
28.5" X 28.5"

### \*THICKNESSES

**Standard:**  
8MM & 9.5MM

### COVERAGE

5.64 SQ FT/TILE

### COLORED EPDM GRANULATE

1MM TO 3MM

### BINDER

POLYURETHANE

### \*CUSTOM AVAILABLE

Ultimate Tough Zip-Tiles contain up to 92% recycled rubber material, manufactured in the USA, and are all covered by our Limited Warranties.

Made From Recycled Rubber!

**CALL TODAY**  
FOR A CUSTOM QUOTE!


## ZIP-TILE SPECIFICATIONS

TEST TYPE	ASTM	RESULT
SHORE HARDNESS	D-2240	65 +/- 5
DENSITY	D-395	60-80 LBS./CU.FT.
ELONGATION (AT BREAK)	D-412	95% - 120%*
TENSILE STRENGTH	D-412	260 - 340 PSI*
COMPRESSION SET	D-395	-4.8%
VOC EMISSIONS	D-5116	0.5 MG/M <sup>2</sup> OR LESS
RESISTANCE TO CHEMICALS	F-925-02	NO CHANGE
STATIC LOAD LIMIT	F-970	PASSES, 150 PSI
SURFACE FLAMMABILITY	D-2895	PASS
DIE-C TEAR	D-624	80 MIN
COEFFICIENT OF FRICTION	D-1894-95	>0.8*

### \*VARIES BASED ON COLOR

Note: Physical properties can vary by product type. Information above applies to this product only.

## STANDARD COLORS

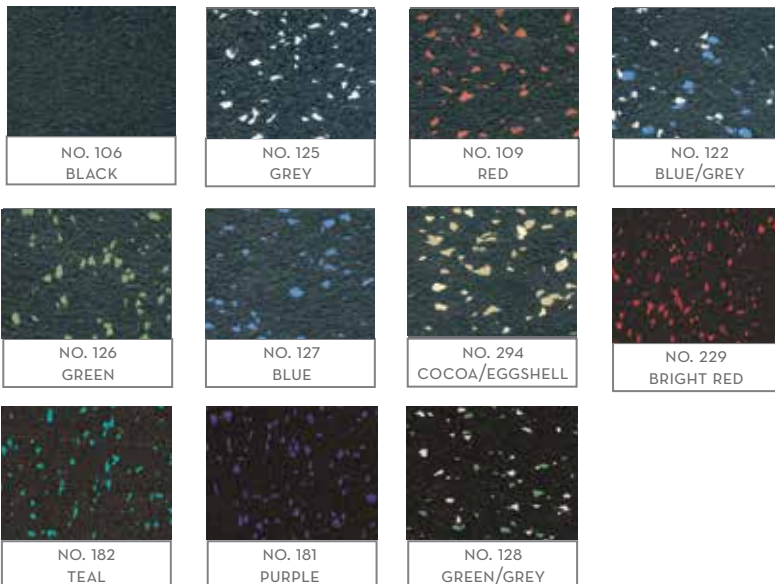

## MAINTENANCE & FLOOR CARE

Maintenance and floor care depend on the desired appearance of the installed product and the type of equipment used to maintain the flooring. Use only Ultimate RB recommended cleaners, disinfectant, and neutral PH, non-petroleum products. Do not use harsh chemicals. For specific products recommended by Ultimate RB, visit [UltimateRB.com](http://UltimateRB.com)

## WARRANTY

Ultimate Tough Zip-Tiles carry a 5-year limited warranty for defects in material and workmanship. Refer to [UltimateRB.com](http://UltimateRB.com) for limited warranty document.

Rev 12/18 | Ult. #3



1430 North Main St.  
Delphos, OH 45833  
T. 419.692.3005

904 NE 10th Ave.  
McMinnville, OR 97128  
T. 503.472.4691



© 2018 Ultimate RB  
All rights reserved  
[www.UltimateRB.com](http://www.UltimateRB.com)