




48" RACK

Your customers will find hundreds of uses for the Ultimate RB MULTI-MAT non-slip surfacing. The Ultimate RB MULTI-MAT display accommodates two rolls, at 1/4" and 3/8" thick. Great for a variety of needs such as aiseways, dog runs, trailer wall linings, work bench surfacing and much more. The possibilities are endless when you need a non-slip, highly durable surface.

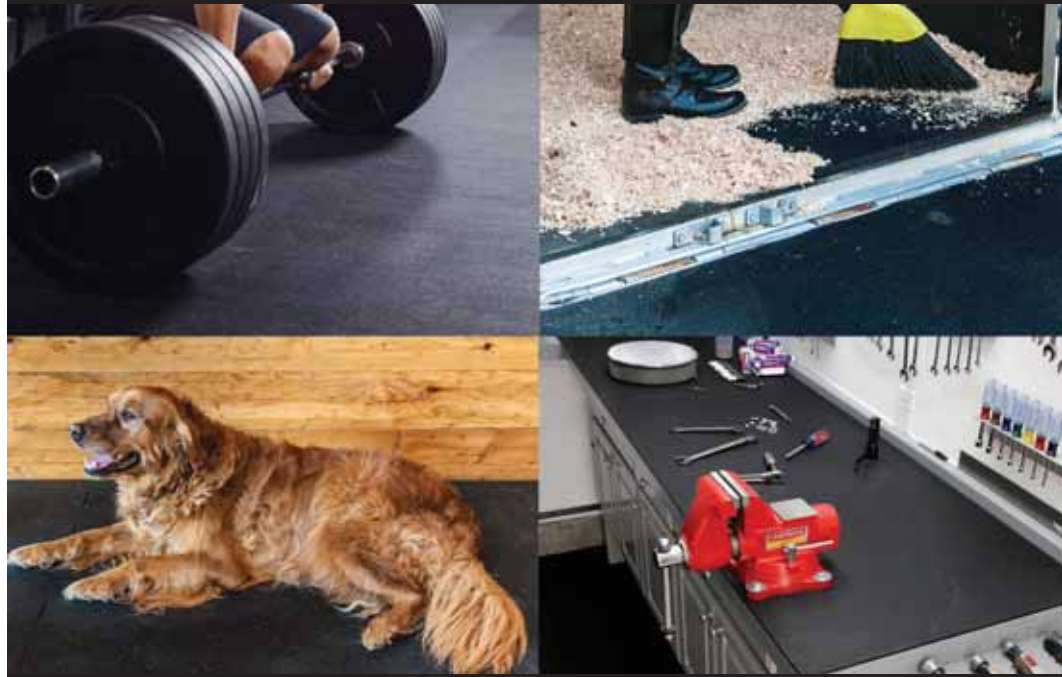

MULTI-MATS BENEFITS:

- | | | |
|---------------------|--------------------|---------------------|
| TRAILER FLOORING | WORK BENCHES | TOOL BOXES |
| SHELVES | BOATS | ANTI-FATIGUE MAT |
| WEIGHT ROOMS | ELECTRICAL ROOMS | GARDEN WEED BARRIER |
| GARAGES & BASEMENTS | LARGE DOOR MATS | PLAYROOMS |
| MOTOR HOMES | DECKS | SUV's/TRUCKS |
| EQUIPMENT STORAGE | TRUCK BEDS | PET MAT |
| DOOR MATS | HIGH TRAFFIC AREAS | HANDICAP ACCESS WAY |

CONVENIENT

Display and storage rack allows for easy point-of-sale retail display. Holds 2 rolls.

EFFICIENT

MULTI-MATS are resilient, shock and sound absorbing, and provide excellent traction and anti-fatigue qualities. They also provide an effective buffer against acoustical vibration.

DURABLE

Specially formulated high strength binders, similar to those used in synthetic running tracks, are used in conjunction with heat and pressure.

VERSATILE

Two standard thicknesses, 1/4" and 3/8" in 25' or 50' standard lengths. Easy to cut with a straight edge and standard utility knife. Easy installation using factory recommended adhesives.

EASY TO CLEAN

Indoor cleaning involves a broom, damp sponge mop, or vacuum cleaner. Outside, a water hose, leaf blower, or broom is sufficient.



FLOORING SPECIFICATIONS



TYPICAL PROPERTIES

ROLL SIZES

30IN X 25FT TO 50FT (76.2CM X 7.62M TO 15.24M)
48IN X 25FT OR 50FT (122CM X 7.62M OR 15.24M)

THICKNESS

Standard:

1/4" (6.35MM)
3/8" (9.53MM)

RACK SIZES

44IN WIDE X 24.5IN HIGH (112CM X 62CM) FOR THE 30IN ROLL
56IN WIDE X 65IN HIGH (142.24CM X 165CM) FOR THE 48IN ROLL

BINDER

URETHANE

SURFACE

SMOOTH TEXTURE SURFACE

NOTE:

Physical properties can vary by product type.
Information above applies to this product only.



ROLL SPECIFICATIONS

TEST TYPE	ASTM	RESULT
SHORE HARDNESS	D-2240	60 +/- 5
DENSITY	D-395	50-70 LBS./CU.FT.
ELONGATION (AT BREAK)	D-412	100%-120%*
TENSILE STRENGTH	D-412	210-270 PSI*
COMPRESSION SET	D-395	-8.1% @25%
VOC EMISSIONS	D-5116	0.5 MG/M ² OR LESS
RESISTANCE TO CHEMICALS	F-925-02	NO CHANGE
STATIC LOAD LIMIT	F-970	PASSES, 150 PSI
SURFACE FLAMMABILITY	D-2895	PASS
DIE-C TEAR	D-624	80 MIN
COEFFICIENT OF FRICTION	C-1028	70.8

* VARIES BASED ON COLOR

MAINTENANCE & FLOOR CARE

Use only Ultimate RB recommended cleaners, disinfectant, and neutral PH, non-petroleum products. Do not use harsh chemicals. For specific products recommended by Ultimate RB, visit www.UltimateRB.com or call the number listed below.

WARRANTY

Ultimate RB MULTI-MAT non-slip surfacing carries a 5-year limited warranty for manufacturing defects in material and workmanship.