

*Popular in health and fitness clubs, weight rooms, and ice rinks, **ULTIMATE-TOUGH** recycled rubber flooring is a champion in a wide variety of applications.*

- High Impact Durability
- Manufactured in the USA
- Premium Recycled Rubber
- Slip and Impact Resistant
- Easy to Clean
- Environmentally Friendly
- Customizable
- Shock and Sound Absorbing
- FloorScore Certified

#### ULTIMATE-TOUGH ROLLS & TILES BENEFITS

WEIGHT ROOMS & GYMS	SCHOOL CAFETERIAS	SKI & SNOWBOARD SHOPS
MULTI-PURPOSE ROOMS	CONCESSION AREAS	HOME GYM FLOORING
WORK AREAS	ICE RINK WALKWAYS	STATIONARY BIKE MATTING
JUNGLE GYM & PLAY AREAS	FACTORY FLOORS	LOCKER ROOMS

#### ULTIMATE-TOUGH PRODUCTS

Available in rolls or tiles, ULTIMATE-TOUGH is ideal for high-wear and high-impact spaces that require maximum subfloor protection. Home gyms, weight rooms, and basements all benefit from durable rubber tile. It is manufactured from post-consumer recycled rubber buffings with small percentages colored EPDM. ULTIMATE-TOUGH is the recommended choice for high-traffic active spaces. It provides excellent high-impact durability and superior slip resistance in wet or dry conditions. ULTIMATE-TOUGH also combines anti-fatigue and ergonomic comfort properties with very low maintenance. Containing up to 92% recycled content range and low VOC emissions, ULTIMATE-TOUGH is widely regarded as the premier “green” resilient flooring choice. It is available in rolls and interlocking and square tiles, and comes in 7 standard colors in variable thicknesses. Custom colors are also available.



## ULTIMATE-TOUGH ROLLS & TILES SPECIFICATIONS



### INTERLOCKING TILE DIMENSIONS

#### TILE SIZES

##### \*Zip-Tile

28.5" X 28.5"      5.64 SQ FT  
STANDARD SIZE 9.5MM THICKNESS & 20% COLOR

##### \*Tru-Lock Tile

24" X 24"      4 SQ FT  
STANDARD SIZE 8MM THICKNESS & 10% COLOR

\*CUSTOM AVAILABLE



### ROLL DIMENSIONS

#### \*WIDTH

##### Standard:

4 FT. (1.22M)

#### WIDTH TOLERANCES

48" CUT @ 48.5" +/- 0.24"

#### \*THICKNESS

##### Standard:

4MM TO 12MM

+/- 0.015"

#### \*LENGTH

##### Standard:

25 FT. & 50 FT.

The color concentration of the standard rolls and tiles is 20%.

\*CUSTOM AVAILABLE    \* 3 FT. AVAILABLE AS CUSTOM WIDTH



### ULTIMATE-TOUGH SPECIFICATIONS


TEST TYPE	ASTM	RESULT
SHORE HARDNESS	D-2240	65 +/- 5
DENSITY	D-792	60-80 LBS./CU.FT.
ELONGATION (AT BREAK)	D-412	95% - 120%*
TENSILE STRENGTH	D-412	260 - 340 PSI*
COMPRESSION SET	D-395	-4.8%
VOC EMISSIONS	D-5116	0.5 MG/M <sup>2</sup> OR LESS
RESISTANCE TO CHEMICALS	F-925-02	NO CHANGE
STATIC LOAD LIMIT	F-970	PASSES, 150 PSI
DIE- C TEAR	D-624	80 MIN
SURFACE FLAMMABILITY	D-2859	PASS
COEFFICIENT OF FRICTION	D-1894-95	>0.8*

\*VARIES BASED ON COLOR

#### NOTE:

Physical properties can vary by product type. Information above applies to this product only.

## COLOR OPTIONS

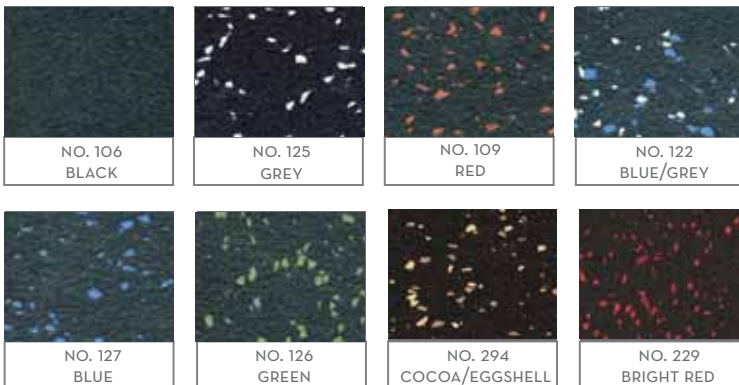

Brick Red, Purple, Teal, Green/Grey and other custom colors available by request.

## MAINTENANCE & FLOOR CARE

Maintenance and floor care depend on the desired appearance of the installed product and the type of equipment used to maintain the flooring. Use only Ultimate RB recommended cleaners, disinfectant, and neutral PH, non-petroleum products. Do not use harsh chemicals. For specific products recommended by Ultimate RB, visit [UltimateRB.com](http://UltimateRB.com).

## WARRANTY

ULTIMATE-TOUGH Rolls and Tiles carry a 5-year limited warranty for defects in material and workmanship. Refer to [UltimateRB.com](http://UltimateRB.com) for limited warranty document.

Rev 1/20 | Ult. #1



904 NE 10th Ave.  
McMinnville, OR 97128  
800.525.5530 • 503.472.4691

Main manufacturing/shipping locations include Oregon and Ohio



© 2020 Ultimate RB  
All rights reserved.  
[www.UltimateRB.com](http://www.UltimateRB.com)