

The new TRU-LOCK tile is designed to cover 4 sq ft per tile. This makes estimating the quantity of tiles needed simple. TRU-LOCK provides all of the below benefits and more.

- Recycled Rubber
- Slip Resistant
- Limitless Color Options
- Environmentally Friendly
- Design Flexibility
- Easy Installation
- Sound & Shock Absorbing
- Easy Maintenance
- FloorScore Certified



INTRODUCING ULTIMATE-TOUGH™ TRU-LOCK™



ULTIMATE-TOUGH TRU-LOCK TILE BENEFITS

HOME GYM FLOORING	STATIONARY BIKE MATTING	PHYSICAL THERAPY FACILITIES
SKI & SNOWBOARD SHOPS	RAMPS & INCLINES	SCHOOLS
WEIGHT ROOMS & GYMS	BASEBALL AREAS	LOCKER ROOMS
HEAVY TRAFFIC AREAS	ICE RINK WALKWAYS	MULTI-PURPOSE ROOMS

ULTIMATE-TOUGH TRU-LOCK

Flooring in athletic facilities must stand up to a variety of special demands ranging from the punishment of free weights to the shearing effect of ice skates. It must also provide noise reduction and a comfortable surface for the athletes. Recycled rubber flooring meets all these requirements. ULTIMATE-TOUGH TRU-LOCK tiles offer superior durability, resilience, sound absorption, spike resistance, and traction.

These tiles are engineered so precisely that the intricate interlocking pattern nearly disappears as the tiles are installed. The tab design holds the tiles together securely without the need for expensive adhesives, tapes, or the labor to apply them. The TRU-LOCK tiles can also be disassembled and re-assembled time and again without damaging the tiles. Also they offer great anti-fatigue qualities. Fabricated from fine rubber granules, their resilient properties give superior underfoot comfort to cushion the strain from running, exercising, and walking. On top of that, they are also very easy to clean.

Rev 01/20 | Ult. #12

ULTIMATE-TOUGH SPECIFICATIONS

TYPICAL PROPERTIES

TILE SIZES

Interlocking

24" X 24" INSIDE TO OUTSIDE
LOCKING TABS

THICKNESSES*

Standard:

8MM

COVERAGE

4 SQ FT/TILE

TOLERANCE

+/- 0.020"

*CUSTOM AVAILABLE

ULTIMATE-TOUGH contains up to 92% recycled rubber material, manufactured in the USA, and are all covered by our Limited Warranties.


SPECIFICATIONS

TEST TYPE	ASTM	RESULT
SHORE HARDNESS	D-2240	65 +/- 5
DENSITY	D-395	60-80 LBS./CU.FT.
ELONGATION (AT BREAK)	D-412	95% - 120%*
TENSILE STRENGTH	D-412	260 - 340 PSI*
COMPRESSION SET	D-395	-4.8%
VOC EMISSIONS	D-5116	0.5 MG/M ² OR LESS
RESISTANCE TO CHEMICALS	F-925-02	NO CHANGE
STATIC LOAD LIMIT	F-970	PASSES, 150 PSI
SURFACE FLAMMABILITY	D-2895	PASS
DIE-C TEAR	D-624	80 MIN
COEFFICIENT OF FRICTION	D-1894-95	>0.8*

*VARIES BASED ON COLOR

Note: Physical properties can vary by product type. Information above applies to this product only.

COLOR OPTIONS

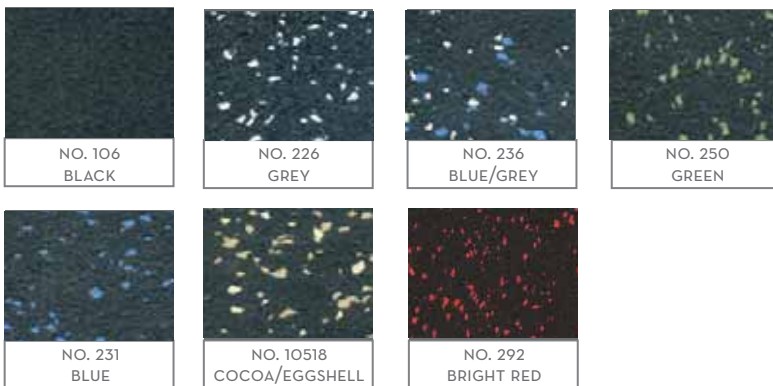

Brick Red, Purple, Teal, Green/Grey and other custom colors available by request.

MAINTENANCE & FLOOR CARE

Maintenance and floor care depend on the desired appearance of the installed product and the type of equipment used to maintain the flooring. Use only Ultimate RB recommended cleaners, disinfectant, and neutral PH, non-petroleum products. Do not use harsh chemicals. For specific products recommended by Ultimate RB, visit www.UltimateRB.com.

WARRANTY

ULTIMATE-TOUGH TRU-LOCK tiles carry a 5-year limited warranty for defects in material and workmanship. Refer to UltimateRB.com for limited warranty document.