




ULTIMATE-TOUGH™ Zip-Tiles

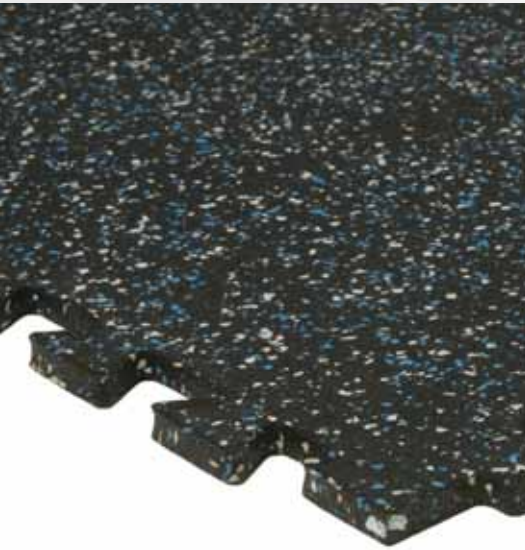

ULTIMATE-TOUGH Zip-Tiles stand up to the demands of athletic facilities by providing superior durability, resilience, spike resistance, and traction.

Features and Benefits

- Recycled Rubber
- Slip Resistant
- Limitless Color Options
- Environmentally Friendly
- Design Flexibility
- Easy Installation
- Sound & Shock Absorbing
- Easy Maintenance
- FloorScore Certified



ULTIMATE RB.com

904 NE 10th Avenue
McMinnville, OR 97128
(800) 525-5530 ▪ (503) 472-4691

Main manufacturing/shipping locations include Oregon and Ohio.

Applications:

- Home Gym Flooring
- Stationary Bike Matting
- Physical Therapy Facilities
- Ski & Snowboard Shops
- Ramps & Inclines
- Schools
- Weight Rooms & Gyms
- Baseball Areas
- Locker Rooms
- Heavy Traffic Areas
- Ice Rink Walkways
- Multi-Purpose Rooms

Flooring in athletic facilities must stand up to a variety of special demands ranging from the punishment of free weights to the shearing effect of ice skates. It must also provide noise reduction and a comfortable surface for the athletes. Recycled rubber flooring meets all these requirements. ULTIMATE-TOUGH Zip-Tiles offer superior durability, resilience, sound absorption, spike resistance, and traction.

These tiles are engineered so precisely that the intricate interlocking pattern nearly disappears as the tiles are installed. The unique tab design holds the tiles together securely without the need for expensive adhesives, tapes, or the labor to apply them. The ULTIMATE-TOUGH Zip-Tiles can also be disassembled and re-assembled time and again without damaging the tiles. Zip-Tiles also offer great anti-fatigue qualities. Fabricated from fine rubber granules, their resilient properties give superior underfoot comfort to cushion the strain from running, exercising, and walking. On top of that, they are also very easy to clean.

Declare.





ULTIMATE-TOUGH™ Zip-Tiles



Typical Properties

Property	Results
Tile Sizes	Interlocking 28.5" x 28.5"
*Thicknesses	Standard: 9.5mm
Coverage	5.64 sq ft/tile Standard: 9.5mm thickness and 20% color


*Custom available

ULTIMATE-TOUGH Zip-Tiles contain up to 92% recycled rubber material, manufactured in the USA, and are all covered by our Limited Warranties.

Color Options




NO. 106
Black




NO. 125
Grey



NO. 122
Blue/Grey




NO. 126
Green



NO. 127
Blue



NO. 294
Cocoa/Eggshell



NO. 229
Bright Red

Brick Red, Purple, Teal, Green/Grey and other custom colors available by request.



Specifications

Test Type	ASTM	Result
Shore Hardness	D-2240	65 +/- 5
Density	D-395	63-94 lbs/ft ³
Elongation (at break)	D-412	50-150%
Tensile Strength	D-412	200-400 PLS
Compression Set	D-395	-15 to -45% @ 25%
VOC Emissions	D-5116	0.5 mg/m ² or less
Resistance To Chemicals	F-925	No Change
Static Load Limit	F-970	Passes, 150 PSI
Surface Flammability	D-2895	Pass
Die-C Tear	D-624	80 min
Coefficient of Friction	D-1894	0.75-1.50
Durometer	D-2240	60 +/- 5 Shore A
Tear Resistance	D-624	50-125 PLI

*Varies based on color

Note: Physical properties can vary by product type. Information above applies to this product only.

Maintenance & Floor Care

Maintenance and floor care depend on the desired appearance of the installed product and the type of equipment used to maintain the flooring. Use only Ultimate RB recommended cleaners, disinfectant, and neutral PH, non-petroleum products. Do not use harsh chemicals. For specific products recommended by Ultimate RB, visit www.UltimateRB.com.

Warranty

ULTIMATE-TOUGH Zip-Tiles carry a 5-year limited warranty for defects in material and workmanship. Refer to UltimateRB.com for limited warranty document.