




## MULTI-MAT™ Non-Slip Surfacing



48" Rack

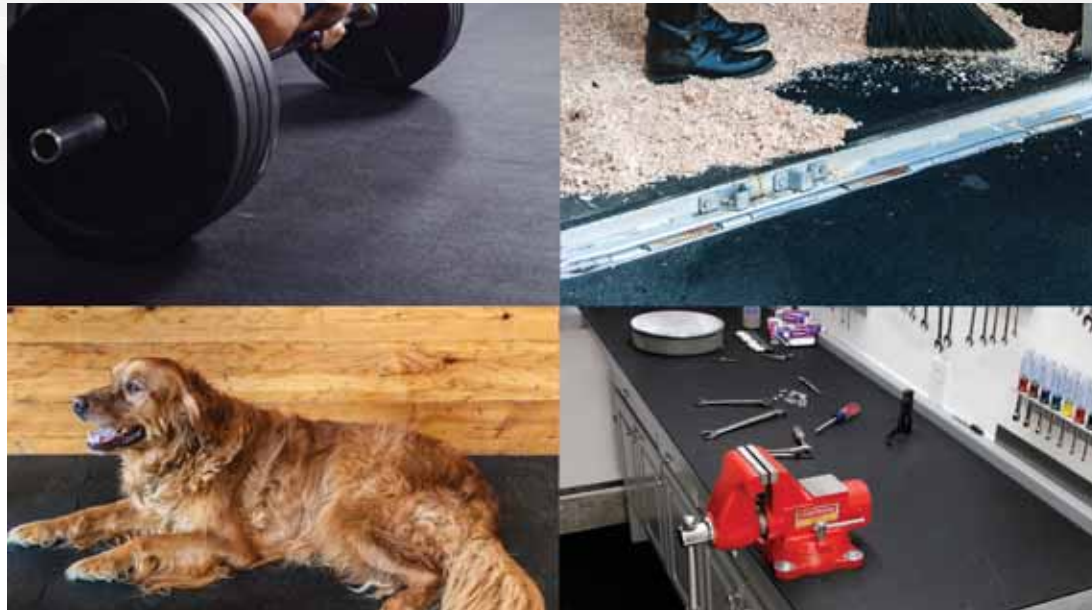

Your customers will find hundreds of uses for the Ultimate RB MULTI-MAT non-slip surfacing. The Ultimate RB MULTI-MAT display accommodates two rolls, at ¼" and ⅜" thick. Great for a variety of needs such as aisleways, dog runs, trailer wall linings, work bench surfacing and much more. The possibilities are endless when you need a non-slip, highly durable surface.

### Applications:

- Trailer Flooring
- Shelves
- Weight Rooms
- Garages & Basements
- Motor Homes
- Equipment Storage
- Door Mats
- Work Benches
- Boats
- Electrical Rooms
- Large Door Mats
- Decks
- Truck Beds
- High Traffic Areas
- Tool Boxes
- Anti-Fatigue Mat
- Garden Weed Barrier
- Playrooms
- SUV's/Trucks
- Pet Mat
- Handicap Access Way

### CONVENIENT

Display and storage rack allows for easy point-of-sale retail display. Holds 2 rolls.

### EFFICIENT

MULTI-MATS are resilient, shock and sound absorbing, and provide excellent traction and anti-fatigue qualities. They also provide an effective buffer against acoustical vibration.

### DURABLE

Specially formulated high strength binders, similar to those used in synthetic running tracks, are used in conjunction with heat and pressure.



**ULTIMATE RB.com**

904 NE 10<sup>th</sup> Avenue  
McMinnville, OR 97128  
(800) 525-5530 ▪ (503) 472-4691

Main manufacturing/shipping locations include Oregon and Ohio.

**Declare.**





# MULTI-MAT Non-Slip Surfacing

## VERSATILE

Two standard thicknesses, 1/4" and 3/8" in 25' or 50' standard lengths. Easy to cut with a straight edge and standard utility knife. Easy installation using factory recommended adhesives.

## EASY TO CLEAN

Indoor cleaning involves a broom, damp sponge mop, or vacuum cleaner. Outside, a water hose, leaf blower, or broom is sufficient.

## Typical Properties

Property	Results
Roll Sizes	30in x 25ft to 50ft (76.2cm x 7.62m to 15.24m) 48in x 25ft or 50ft (122cm x 7.62m or 15.24m)
Thickness	<b>Standard:</b> 1/4" (6.35mm) 3/8" (9.53mm)
Rack Sizes	44in wide x 24.5in high (112cm x 62cm) for the 30in roll 56in wide x 65in high (142.24cm x 165cm) for the 48in roll
Binder	Urethane
Surface	Smooth texture surface

Note: Physical properties can vary by product type. Information above applies to this product only.



## Roll Specifications

Test Type	ASTM	Result
Shore Hardness	D-2240	65 +/- 5
Density	D-395	60-94 lbs/ft <sup>3</sup>
Elongation (at break)	D-412	50-150%
Tensile Strength	D-412	200-400 PSI
Compression Set	D-395	-15 to -45% @ 25%
VOC Emissions	D-5116	0.5 mg/m <sup>2</sup> or less
Resistance To Chemicals	F-925	No Change
Static Load Limit	F-970	Passes, 150 PSI
Surface Flammability	D-2895	Pass
Die-C Tear	D-624	80 min
Coefficient of Friction	D-1894	0.75-1.50
Durometer	D-2240	60 +/- 5 Shore A
Tear Resistance	D-624	50-125 PSI

\*Varies based on color

## Maintenance & Floor Care

Use only Ultimate RB recommended cleaners, disinfectant, and neutral PH, non-petroleum products. Do not use harsh chemicals.

For specific products recommended by Ultimate RB, visit [www.ULTIMATERB.com](http://www.ULTIMATERB.com) or call the number listed below.

## Warranty

Ultimate RB MULTI-MAT non-slip surfacing carries a 5-year limited warranty for manufacturing defects in material and workmanship.